

Country of Origin : China

Efficiency level (ErP) : VI



GREEN MODE **RoHS**




Features:

PWMIC electrical design.	For I.T.E. use only + RoHS conform.
Wide range Input (90 ~ 264) VAC / (47 ~ 63) Hz.	Over load, over voltage & short protection.
Output connector: standard: 2.1x5.5x11 or customer requirement.	
Available in versions: W2E(EU), W2(USA), W3U(UK), W2A (Australia), W2K(Korea), W2C (China).	

Specification:

	Model	Voltage DC [V]	Loading [A]	Tol. [%]	OCP [A]	OVP max [V]	Efficiency [%]	Max. Power [W]	Ripple & Noise [mV] p-p	Connector UL Approved [mm]
ErP V.	SYS1308-1808-W2E	7.5	0~2.40	±5	3.0~5.5	16	>77.6	18	100	2.1x5.5x11
OEM Production	This model is certified for Uout=(3,5,6,7,5,9,12,15,18,24,48)V and Pout=in steps(9,15,18,24)W									
INPUT	Voltage		(90 ~ 264)VAC							
	Frequency		(47 ~ 63)Hz							
	Current		1A rms@ AC low line input and DC output full load							
	Inrush Surge Current (cold start)		40/60Amax. @ power supply cold start, ambient temperature 25°C @115Vac/230Vac nominal AC input.							
	Leakage current		<0.25 mA @ 240VAC input							
PROTECTION	Over load	OCP	Fold back							
	Over Voltage	OVP	Voltage limiting							
	Short Circuit		Yes, Output to Ground, Auto recovery when fault has been removed. Short Current & Over Current can not exceed 8A max. after 1minute at nominal line input.							
	Protection class		II.							
	No Load Operation		Yes, to protect the power supply and system from damage							
OTHERS	Dielectric Strength		HI-POT B / I/P-O/P (FG): 3KVAC / 10mA / 1 minute							
	Set up time		3000 ms max. @ AC low line Input & Output full load							
	Hold-up Time		10ms @ AC nominal Input and Output full load							
	MTBF Qualification		500,000 Calculated Hours at 25°C, by Telcordia SR-332							
	DC cable & connector		Standard length of the cable 1,8m & It depends on customer requirements and upon specifications							
	Efficiency (Normal)		>77.6% min. @ 240VAC input & Full load							
	Efficiency level		V							
	Power Consumption		Max. 0.3W @ AC nominal Input and Output min. load – ERP IV. / ERP V has <0.3W							
	Input Fuse		1A protected against power line surges and any abnormal conditions							
ENVIRONMENT	Temperature		Operating: (0 ~ 40)°C / Storage: (-20 ~ 85)°C							
	Humidity		Operating: (8 ~ 90)% RH / Storage: (5 ~ 95)% RH non condensing							
SAFETY	CE GS CB cULus FCC CCC KC SAA RCM									
CE	EMC		2014/30/EU							
	LVD		2014/35/EU EN 60950							
WEIGHT	1pc		N.W.: 150g / pc							
			0.48 x 0.26 x 0.44 [m]							
PACKING	Box		80pcs / 1box							
			G.W.: 16.8kg / box							

Mechanical case specification:

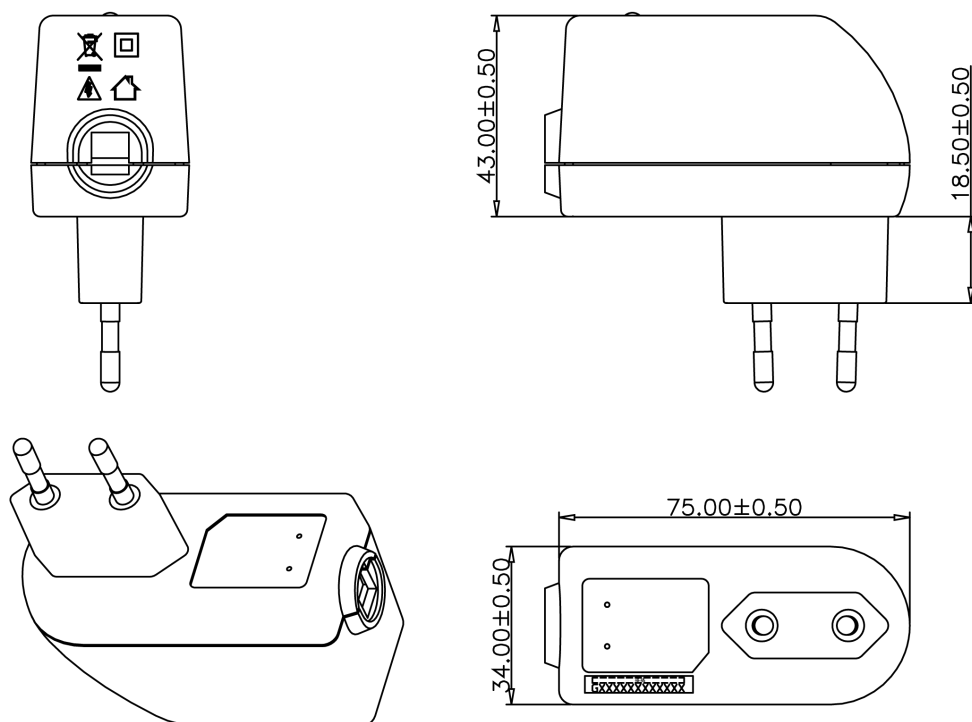

Cable specification:

1185#20*1C + shield / 6FT (1830mm)

